



UPS for tower and rack usage

System configurator and order-information guide

January 2016

Contents

Configurator diagram Line Interactive UPS APC
Configurator diagram Line Interactive UPS Fujitsu
Configurator diagram Online UPS
Configurator diagram Gen2 Online UPS Fujitsu
Data Sheets Smart UPS for PRIMERGY Servers
Change Report



PRIMERGY Server

Configuration and Order Options for Uninterruptible Power Supplies (UPSs) from APC (American Power Conversion)

- Uninterruptible power supplies (UPSs) as rack / tower convertible modules rated at 5000 VA.
Following software packages and cables are shipped with each UPS.

Packages for all 5000 VA UPS

- APC-UPS 5000 VA (5U, for 19" rack) S26113-E442-E50: (5U inclusive SNMP WEB Management Card), for mounting in 19" Racks
- APC-UPS 5000 VA (5U, for 19" rack) S26113-E442-L50: (5U inclusive SNMP WEB Management Card)

Package is included in each UPS above :

- for the 5000 VA you need an fix single phase connection
made by an electrician according to the VDE standards, no power cord is delivered
- Black cable for the RS232-interface. (COM-signalcable for 1. server)

- Power cord (up to 4x) with IEC 320 C13 connector to the outlet of the UPS
- Power cord (up to 2x) with IEC 320 C19 connector to the outlet of the UPS
- CD-ROM with PowerChute Business Edition V9.0.1 for:
OS list refer below
- APC Configuration Wizard on CD-Rom
- CD-Rom with PowerChute Network shutdown >= 3.0.1, including 24 Traps on CD for all UPS delivered with Network Management Card
OS list refer below

On the Server Start CD-Rom, distributed with every Primergy Server, are the agents for Server View.

The APC Products are integrated in Server View and Server Start.

If you use indication over the Network management card, USP requires only one LAN connector. Cable joints to the servers are required.

Additional components are:

*UPS Network Management adapter for 10/100 Base-T and Telnet connectors,
supports 10/100 Mbit/s autosense and the protocols Telnet, FTP, TFTP, WEB and SNMP

OS list for serial and USB connectivity by help of APC PowerChute Business Edition (PCBE) v9.0.1 on CD in the Box

- Windows Server Operating Systems
- Windows Server 2012 without Hyper-V support
 - Windows Server 2008 R2 without Hyper-V support
- Linux Enterprise OS
- Red Hat Enterprise Linux 5 32-bit and 64-bit
 - Red Hat Enterprise Linux 6 32-bit and 64-bit
 - SUSE Linux Enterprise Server 10 32-bit and 64-bit
 - SUSE Linux Enterprise Server 11 32-bit and 64-bit

Further OS support and hints please have a look into actual release copatibility chart of APC PCBE

OS list for LAN connectivity by help of APC PowerChute Network Shutdown (PCNS) v3.0.1 on CD in the Box

Uses the installed Web Management card in the UPS


- Windows Server Operating Systems
- Windows Server 2012 with Hyper-V support
 - Windows Server 2008 R2 with Hyper-V support
- Linux Enterprise OS
- Red Hat Enterprise Linux 5 32-bit and 64-bit
 - Red Hat Enterprise Linux 5 [KVM / XEN] 64-bit
 - Red Hat Enterprise Linux 6 32-bit and 64-bit
 - Red Hat Enterprise Linux 6 [KVM] 64-bit
 - SUSE Linux Enterprise Server 10 32-bit and 64-bit
 - SUSE Linux Enterprise Server 11 32-bit and 64-bit
 - SUSE Linux Enterprise Server 11 [XEN] 64-bit
- VMware Hypervisor
- ESX 4.0 (inc. FT)
 - ESX 4.1 (inc. FT)
 - ESXi 4.1 Installable (inc. FT)
 - ESXi 5.0 (inc. FT)
 - ESXi 5.1 (inc. FT)

Citrix

- Xen Server 5.6 on selected PRIMERGY systems only

Solaris 10 and 11 supported on SPARC Enterprise servers

Further OS support and hints please have a look into actual release copatibility chart of APC PCBE

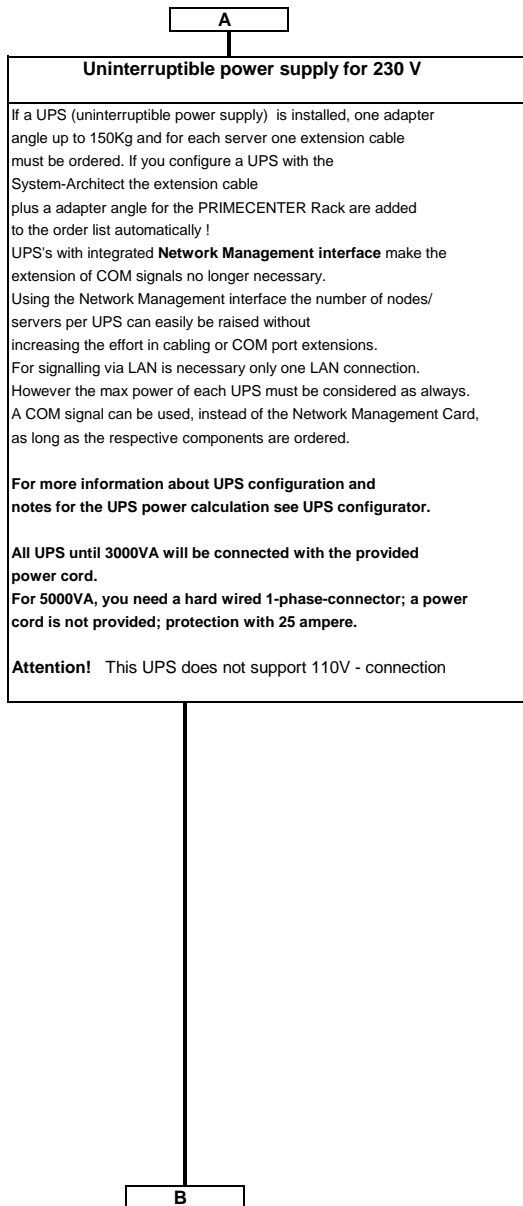

C

Fujitsu 19"- Rack UPS variants

All UPSs and accessories are delivered in PRIMECENTER Racks with 12/24 U resp 38 U in built-in condition, to 46 U FSC racks the cabling and installation of carrier rails are afforded.

S26361-F2735-E31
 Adapter angle PC/DC-Rack, till 150kg, reinforced (3U)

As long as available, EOL planned for End July 2015

S26113-E442-E50
 APC -UPS rated 5KVA
 Tower / Rack convertible
 effective power 4000 W
 black, COM port
 with integrated
 Network Management Card
 one Smart Slot
 stand up feets for Tower incl.
 5U in 19" racks
 Output :
 8x IEC320 C13 (10A)
 2x IEC320 C19 (16A)
 1-phase hard wiring
 trough electrician needed
occupies 5U in racks

i The 5000 VA UPS has a 1-phase permanent connection, it must be attached by an electrician.

i Note: 5kVA UPS must be installed in lowest position in a Rack. No other component or server shall be installed below this UPS

For Bulk delivery
S26113-E442-L50

S26113-F80-L30
 APC-UPS WEB Management Adapter
 10 / 100 Mbit autosence
 for APC-UPS use one smart slot

The Network Management Card occupies a Smart UPS slot in the 1500, 3000 and 5000 VA UPS.

i All UPSs are equipped with the signal cable and the COM-port connection for the first server. Depending on the UPS the signalling by network require to order the Network Management Card, but no further cable.

END

Configuration and Order Options for Uninterruptible Power Supplies (UPSs) with Fujitsu brand logo by APC (American Power Conversion)

- Uninterruptible power supplies (UPSs) as floorstand units rated at 750 and 1500 VA
- Uninterruptible power supplies (UPSs) as rack / tower convertable modules rated at 1500VA and 3000 VA.

Following software packages and cables are shipped with each UPS.

1.) Packages for all UPS till 1500 VA

- PY LI UPS 750VA Tower, black S26361-F4542-L75
- PY LI UPS 1500VA Tower, black S26361-F4542-L150
- PY LI UPS 1500VA R/T S26361-K1426-V150: (2U, incl. Network Management card), Rack / Tower convertible
- PY LI UPS 3000VA R/T S26361-K1426-V300: (2U, incl. Network Management card), Rack / Tower convertible

Package 1. is included in each UPS above :

- USB cable for one server connection, 3m cable lengst
- Black cable for the RS232-interface. (COM-signalcable for 1. server)
- Power cord (up to 4x) with IEC 320 C13 connector to the outlet of the UPS
- CD-ROM with PowerChute Business Edition V9.x for:

OS list for serial and USB connectivity by help of APC PowerChute Business Edition (PCBE) v9.0.1 on CD in the Box

Windows Server Operating Systems

- Windows Server 2012
- Windows Server 2008 R2

Linux Enterprise OS

- Red Hat Enterprise Linux 5 32-bit and 64-bit
- Red Hat Enterprise Linux 6 32-bit and 64-bit
- SUSE Linux Enterprise Server 10 32-bit and 64-bit
- SUSE Linux Enterprise Server 11 32-bit and 64-bit

Further OS support and hints please have a look into actual release compatibility chart of APC PCBE

2.) Packages for all Rack- / Tower convertible UPS

- PY LI UPS 1500VA R/T S26361-K1426-V150: (2U, incl. Network Management card), Rack / Tower convertible
- PY LI UPS 3000VA R/T S26361-K1426-V300: (2U, incl. Network Management card), Rack / Tower convertible

Package 2. is included in each UPS above :

- Power cord with IEC320 plug for 1500VA,
- Power cord with IEC309 (CEE 16A blue) for the 3000 VA UPS, fixed connected
- USB cable for one server connection, 3m cable lengst
- Black cable for the RS232-interface. (COM-signalcable for 1. server)
- Power cord (up to 4x) with IEC 320 C13 connector to the outlet of the UPS
- CD-ROM with PowerChute Business Edition V9.x for:
 - Same OS released as for package 1
- APC Configuration Wizard on CD-Rom
- CD-Rom with PowerChute Network shutdown >= 3.0.x, including 24 Traps on CD for all UPS delivered with Network Management Card
 - Same OS released as for package 1

OS list for LAN connectivity by help of APC PowerChute Network Shutdown (PCNS) v3.0.1 on CD in the Box

Uses the installed Web Management card in the UPS

Windows Server Operating Systems

- Windows Server 2012
- Windows Server 2008 R2

Linux Enterprise OS

- Red Hat Enterprise Linux 5 32-bit and 64-bit
- Red Hat Enterprise Linux 5 [KVM / XEN] 64-bit
- Red Hat Enterprise Linux 6 32-bit and 64-bit
- Red Hat Enterprise Linux 6 [KVM] 64-bit
- SUSE Linux Enterprise Server 10 32-bit and 64-bit
- SUSE Linux Enterprise Server 11 32-bit and 64-bit
- SUSE Linux Enterprise Server 11 [XEN] 64-bit

VMware Hypervisor

- ESX 4.0 (inc. FT)
- ESX 4.1 (inc. FT)
- ESXi 4.1 Installable (inc. FT)
- ESXi 5.0 (inc. FT)
- ESXi 5.1 (inc. FT)

Citrix

- Xen Server 5.6 on selected PRIMERGY systems only
- Solaris 10 and 11 supported on SPARC Enterprise servers

Further OS support and hints please have a look into actual release compatibility chart of APC PCBE

On the Server Start CD-Rom, distributed with every Primergy Server, are the agents for Server View.

The APC Products are integrated in Server View and Server Start.

If you use indication over the Network management card, USP requires only one LAN connector. Cable joints to the servers are required.

Additional components are:

*UPS Network Management adapter for 10/100 Base-T and Telnet connectors,
supports 10/100 Mbit/s autosense and the protocols Telnet, FTP, TFTP, WEB and SNMP

A

Uninterruptible power supply for 230 V

If a UPS (uninterruptible power supply) is installed, one adapter angle up to 150Kg for Fujitsu Racks 700mm wide must be ordered. If you configure a UPS with the System-Architect a adapter angle for the Fujitsu PRIMECENTER- and M1 Rack are added to the order list automatically !

UPS's with integrated **Network Management interface** make the extension of COM signals no longer necessary. Using the Network Management interface the number of nodes/ servers per UPS can easily be raised without increasing the effort in cabling or COM port extensions. For signalling via LAN is necessary only one LAN connection. However the max power of each UPS must be considered as always. A USB signal can be used, instead of the Network Management Card, as long as the respective components are ordered.

For more information about UPS configuration and notes for the UPS power calculation see UPS configurator.

All UPS until 3000VA will be connected with the provided power cord.
For 5000VA, you need a hard wired 1-phase-connector; a power cord is not provided; protection with 25 ampere.

Attention! This UPS does not support 110V - connection

Power cord for following countries:	
1,8m grey 10A	
Only for USV's < 3000 VA possible	
T26139-Y1740-E10	D, A, B, F, NL, FIN, N, S, E, P, RUS, TR
T26139-Y1743-E10	Switzerland
T26139-Y1744-E10	UK, IR
T26139-Y1745-E10	Italy
T26139-Y1746-E10	Denmark
For each UPV can be ordered a power cord.	



For all APC UPS's to 1500 VA you can order country-specific power cords additionally. For the 3000 VA UPS is needed a 16A (IEC320 C20) plug. Here a power cord with safety socket- and UK- plug is provided. The 5000 VA UPS has a 1-phase permanent connection, it must be attached by an electrician.

B

B	Tower UPS only
S26361-F4542-L75 PY LI UPS 750VA Effective power 500 W USB and COM Port one Smart Slot Output : 6x IEC320 C13 (10A) Power outlet groups: 1 group non-switched no power cord IEC320 C14 input connector Tower	S26361-F4542-L150 PY LI UPS 1500VA Effective power 1000 W USB and COM Port one Smart Slot Output : 8x IEC320 C13 (10A) Power outlet groups: 2 groups, 1 switched No power cord IEC320 C14 input connector Tower

S26361-F4542-L75
 750VA not for PRIMERGY TX200S5/6/7 we recommend to select a 1500VA/1000 W UPS; because high power peaks might be possible when switching over to battery!
 Please pay attention to max. effective power of the attached server system

No external power cord delivered with UPS
 Please order contry specific power cord

S26361-F4542-L75
S26361-F4542-L150
 for loose delivery

All UPSs are equipped with the signal cable and the USB / COM port connection for the first server.
 Depending on the UPS the signalling by network require to order the Network Management Card, but no further cable.

S26113-F80-L30
 APC-UPS WEB Management Adapter
 10 / 100 Mbit autosence
 for APC-UPS use one smart slot

Extended Warranty and Renewal offerings for these Tower UPS

For S26361-F4542-L75 PY LI UPS 750VA

S26361-F4542-L712 WBEXTWAR1YR-SP-02 Extended Warranty 1year for 750VA FJ LI-UPS 1year add-on	S26361-F4542-L722 WBEXTWAR3YR-SP-02 Extended Warranty 3year for 750VA FJ LI-UPS 3year add-on
--	--

For S26361-F4542-L150 PY LI UPS 1500VA

S26361-F4542-L112 WBEXTWAR1YR-SP-03 Extended Warranty 1year for 1500VA FJ LI-UPS 1year add-on	S26361-F4542-L122 WBEXTWAR3YR-SP-03 Extended Warranty 3year for 1500VA FJ LI-UPS 3year add-on
---	---

xx month Extended Warranty – prolongs the Standard Warranty of the UPS (3 years). Need to be purchased within 90 days after UPS was purchased at Fujitsu and requires activation at APC within 30 days thereafter. Warranty cover time is limited to max. 6 years.
Please note: The Extended Warranty does not provide On-Site repair services; it is a material warranty only, but includes the battery.
 Delivery contains documents with warranty information, including the Service Registration Key and the link where to register at APC. Without registration there is no right to claim this service. **Available in all major Fujitsu countries, for details please have a look to the country list.**
 This warranty can be purchased for Fujitsu 750VA / 1500VA Line Interactive Tower UPS.

Such service extensions are available for following countries, further countries please ask FTS Service Group for an offer:
 AUSTRALIA, AUSTRIA, BELGIUM, CANADA, CHINA, CROATIA, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, FRANCE, GERMANY, GREECE, HONG KONG, HUNGARY, INDIA, IRELAND, ITALY, KOREA REPUBLIC OF, LUXEMBOURG, NETHERLANDS, NEW ZEALAND, NORWAY, POLAND, PORTUGAL, ROMANIA, RUSSIAN FEDERATION, SERBIA, SINGAPORE, SLOVAKIA, SOUTH AFRICA, SPAIN, SWEDEN, SWITZERLAND, TAIWAN, PROVINCE OF CHINA, TURKEY, UNITED ARAB EMIRATES, UNITED KINGDOM, UNITED STATES

C

C

Rack- / Tower convertible UPS variants

All UPSs and accessories are delivered in PRIMECENTER M1 Racks with 16 U / 24 U / 42 U Racks in built-in condition, the cabling and installation of carrier rails are afforded.

S26361-K1426-V150
 PY LI UPS 1500VA R/T
 Tower / Rack convertible (2U, for 19" racks)
 effective power 1200 W
 black, USB and COM Port with integrated Network Management Card one Smart Slot for inst. In 19" rack
 delivery includes: stand up feets for Tower Rack Mount Kit (RMK)
 Output : 8x IEC320 C13 (10A)
 Power outlet groups: 3 switched outlet groups
 power cord with 10A extension IEC320 C14 input conector
occupies 2 U in racks

S26361-K1426-V300
 PY LI UPS 3000VA R/T
 Tower / Rack convertible (2U, for 19" rack)
 effective power 2700 W
 black, USB and COM Port with integrated Network Management Card one Smart Slot for inst. In 19" rack
 delivery includes: stand up feets for Tower Rack Mount Kit (RMK)
 Output : 8x IEC320 C13 (10A) 1x IEC320 C19 (16A)
 Power outlet groups: 3 switched outlet groups
 power cord with 1-phase 16A IEC309 plug (CEE blue)
occupies 2 U in racks

S26113-F80-L30
 UPS WEB Management Adapter 10 / 100 Mbit autosense for UPS use one smart slot

i The Network Management Card occupies a Smart UPS slot in the 1500, 3000 and 5000 VA UPS.

i All UPSs are equipped with the signal cable and the USB- / COM-port connection for the first server. All Rackmount types included already the Network Management Card for signaling, a LAN cable needs to be forseen at customer side

i **S26361-K1426-V300**
 incl. Powercord with IEC309 (CEE blue)

i Note: adapter angle is needed for Rack mount only in 700mm wide Fujitsu Racks The RMK is part of shipment

S26361-F2735-E15
 Adapter angle PC/DC-Rack, till 150kg

Extended Warranty and Renewal offerings for these Rack- / Tower convertible UPS

For S26361-K1426-V150 PY LI UPS 1500VA R/T

S26361-F4542-L112
 WBEXTWAR1YR-SP-03
 Extended Warranty 1year for 1500VA FJ LI-UPS 1year add-on

S26361-F4542-L122
 WBEXTWAR3YR-SP-03
 Extended Warranty 3year for 1500VA FJ LI-UPS 3year add-on

For S26361-K1426-V300 PY LI UPS 3000VA R/T

S26361-F4542-L312
 WBEXTWAR1YR-SP-04
 Extended Warranty 1year for 3000VA FJ LI-UPS 1year add-on

S26361-F4542-L322
 WBEXTWAR3YR-SP-04
 Extended Warranty 3year for 3000VA FJ LI-UPS 3year add-on

i **xx month Extended Warranty** – prolongs the Standard Warranty of the UPS (3 years). Need to be purchased within 90 days after UPS was purchased at Fujitsu and requires activation at APC within 30 days thereafter. Warranty cover time is limited to max. 6 years. **Please note:** The Extended Warranty does not provide On-Site repair services; it is a material warranty only, but includes the battery. Delivery contains document with warranty information, including the Service Registration Key and the link where to register at APC. Without registration there is no right to claim this service. **Available in all major Fujitsu countries, for details please have a look to the country list.** This warranty can be purchased for Fujitsu 1500VA / 3000VA Line Interactive Rack- / Tower convertible UPS.

i Such service extensions are available for **above mentioned** countries, further countries please ask FTS Service Group for an offer:

END

Configuration and Order Options for Uninterruptible Power Supplies (UPSs) from APC (American Power Conversion)

- Uninterruptible online power supplies (UPSs) as convertible tower / rack units rated at 3000, 5000, 8000 and 10000 VA.
- as well as external battery extensions for increasing the runtime

Following software packages and cables are shipped with each UPS.

- 1.) Packages for all online UPS till 20.000 VA
 - APC-Online UPS 3000 VA (Tower / Rack 3U) S26361-K915-V301 (Power cord with IEC309 (CEE 16A blue)plug)
 - APC-Online UPS 5000 VA (Tower / Rack 3U) S26361-K915-V501 (hard wired, 1-phase)
 - APC-Online UPS 8000 VA (Tower / Rack 6U) S26361-K915-V80 (hard wired 1- phase or 3- phase selectable)
 - APC-Online UPS 10.000 VA (Tower / Rack 6U) S26361-K915-V100 (hard wired 1- phase or 3- phase selectable)
 - APC-Online UPS Runtime Extension (Tower / Rack 3U) S26361-K915-V1, for APC Online UPS 3KVA to 10KVA
 - APC-Online UPS 20.000 VA (Stack / Rack 12U) S26361-K915-V200 (hard wired 1- phase or 3- phase selectable for input and output)
 - APC-Online UPS Runtime Extension (Stack / Rack 6U) S26361-K915-V2, for APC Online UPS 20KVA only

included in each UPS package (refer above) :

- Power cord with IEC309 (CEE 16A blue) for the 3000 VA , for 5000 VA and above, you need a hard wired single phase connection made by an electrician according to the VDE standards, no power cord is delivered
- Black cable for the RS232-interface. (COM-signalcable for 1. server)
- Power cord (up to 4x) with IEC 320 C13 connector to the outlet of the UPS
- Power cord (up to 2x) with IEC 320 C19 connector to the outlet of the UPS
- additionally for 20kVA UPS a railset (UPS + Battery pack) and stacking brackets are included. A reinforced adapter angle has to be purchased additionally.
- APC Configuration Wizard on CD-Rom
- CD-Rom with PowerChute Network shutdown >= 2.2.3, including 24 Traps on CD for all UPS delivered with Network Management Card
 - Windows® 2003 SP1, SP2 Standard/Enterprise/Web/Small Business Server
 - Windows® 2003 SP1, SP2 Standard/Enterprise Edition for x64
 - Windows® 2003 SP2 Enterprise Edition for IA64
 - Windows® 2003 R2, R2 SP2 Standard/Enterprise
 - Windows® 2003 R2, R2 SP2 Standard/Enterprise for x64
 - MS Windows WEB Server 2008
 - MS Windows Server 2008; Standard w/o Hyper-V
 - MS Windows Server 2008; Enterprise w/o Hyper-V
 - MS Windows WEB Server 2008 (x64)
 - MS Windows Server 2008; Standard (x64) w/o Hyper-V
 - MS Windows Server 2008; Enterprise (x64) w/o Hyper-V
 - Red Hat Enterprise Linux AS / ES 4.0, 5.0 for 32bit, x64 and IA64
 - SuSE Professional Linux 9.0, 10.0
 - SuSE Enterprise Server Linux 9.0, 10.0 for 32bit, x64 and IA64
 - Novell Netware 6.0 and 6.5
 - Solaris 8, 9, 10
 - VMWare ESX 2.5 and 3.0


On the Server Start CD-Rom, distributed with every Primergy Server, are the agents for Server View.

The APC Products are integrated in Server View and Server Start.

If you use indication over the Network management card, USP requires only one LAN connector.

Cable joints to the servers are required.


Signaling and UPS Management via LAN, no serial connections release with new DSP technology

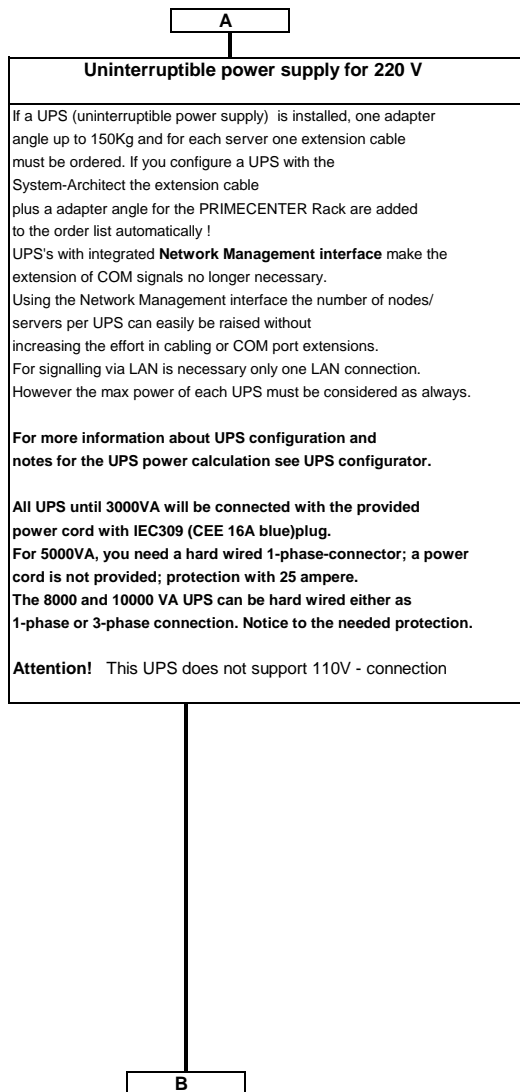

For the 3000 VA UPS is needed a 16A (IEC320 C20) plug. Here a power cord with IEC309 (16A CEE blue) is provided. The 5000 VA UPS has a 1-phase permanent connection, it must be attached by an electrician.



COM port access is not supported for 3kVA up to 20kVA Online UPS by Management SW.

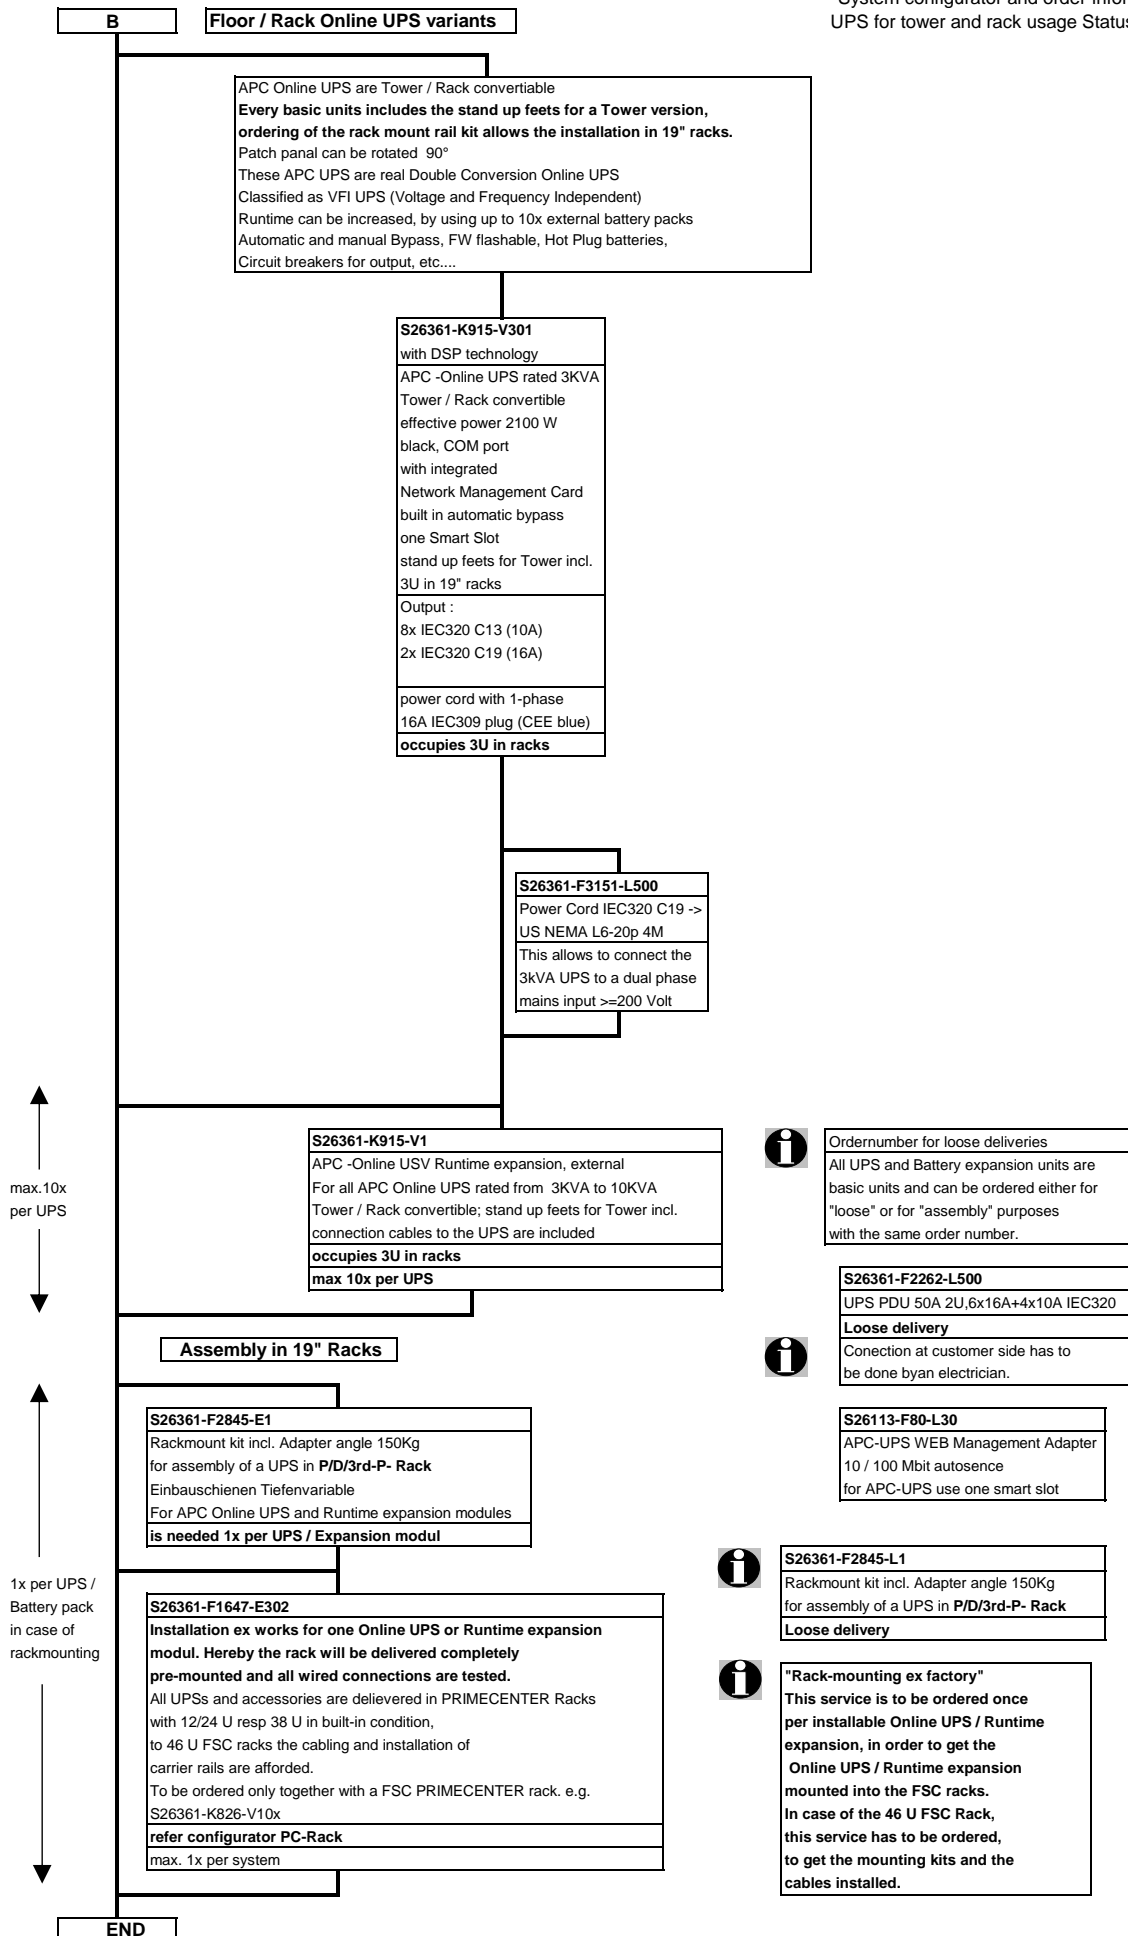

Configuration and Order Options for Uninterruptible Power Supplies (UPSs) with Fujitsu brand logo by APC (American Power Conversion)

- Uninterruptible online power supplies (UPSs) as convertible tower / rack units rated at 3000, 5000, 8000 and 10000 VA.
- as well as external battery extensions for increasing the runtime

Following software packages and cables are shipped with each UPS.

- 1.) Packages for all online UPS till 10.000 VA
 - PY Online UPS 3kVA (Tower / Rack 3U) S26361-K915-V302 (Power cord with IEC309 (CEE 16A blue)plug)
 - PY Online UPS 5kVA (Tower / Rack 3U) S26361-K915-V502 (hard wired, 1-phase)
 - PY Online UPS 8kVA (Tower / Rack 6U) S26361-K915-V801 (hard wired 1- phase or 3- phase selectable)
 - PY Online UPS 10kVA (Tower / Rack 6U) S26361-K915-V102 (hard wired 1- phase or 3- phase selectable)
 - PY Online UPS Battery Ext. 3-5kVA (Tower / Rack 3U) S26361-K915-V3, for PY Online UPS 3KVA and 5kVA
 - PY Online UPS Battery Ext. 8-10kVA (Tower / Rack 3U) S26361-K915-V4, for PY Online UPS 8KVA and 10kVA

included in each UPS package (refer above) :

 - Power cord with IEC309 (CEE 16A blue) for the 3000 VA , for 5000 VA and above, you need a hard wired single phase connection made by an electrician according to the VDE standards, no power cord is delivered
 - Power cord (up to 4x) with IEC 320 C13 connector to the outlet of the UPS
 - Power cord (up to 2x) with IEC 320 C19 connector to the outlet of the UPS
 - APC Configuration Wizard on CD-Rom
 - CD-Rom with PowerChute Network shutdown >= 3.0.1, including 24 Traps on CD for all UPS

OS list for LAN connectivity by help of APC PowerChute Network Shutdown (PCNS) v3.0.1 on CD in the Box

Uses the embedded Web Management card available in all PY Uonline UPS

Windows Server Operating Systems

- Windows Server 2012 R2
- Windows Server 2012
- Windows Server 2008 R2

Linux Enterprise OS

- Red Hat Enterprise Linux 5 32-bit and 64-bit
- Red Hat Enterprise Linux 5 [KVM / XEN] 64-bit
- Red Hat Enterprise Linux 6 32-bit and 64-bit
- Red Hat Enterprise Linux 6 [KVM] 64-bit
- Red Hat Enterprise Linux 7 [KVM] 64-bit
- SUSE Linux Enterprise Server 10 32-bit and 64-bit
- SUSE Linux Enterprise Server 11 32-bit and 64-bit
- SUSE Linux Enterprise Server 11 [XEN] 64-bit
- SUSE Linux Enterprise Server 12 [XEN] 64-bit

VMware Hypervisor

- ESX 4.1 (inc. FT)
- ESXi 5.0 (inc. FT)
- ESXi 5.1 (inc. FT)
- ESXi 5.5

Citrix

- Xen Server 5.6 on selected PRIMERGY systems only
- Xen Server 6.2 on selected PRIMERGY systems only

Solaris 10 and 11 supported on SPARC Enterprise servers

Further OS support and hints please have a look into actual release compatibility chart of APC PCNS

On the Server Start CD-Rom, distributed with every Primergy Server, are the agents for Server View.


The APC Products are integrated in Server View and Server Start.

For communication and management of UPS a Ethernet connection is required to be connected to the LAN connector.

Signaling and UPS Management via LAN, no serial or USB connections release with this new UPS generation.

USB port is for FW upgrade only.

Power cable joints to the servers are required.

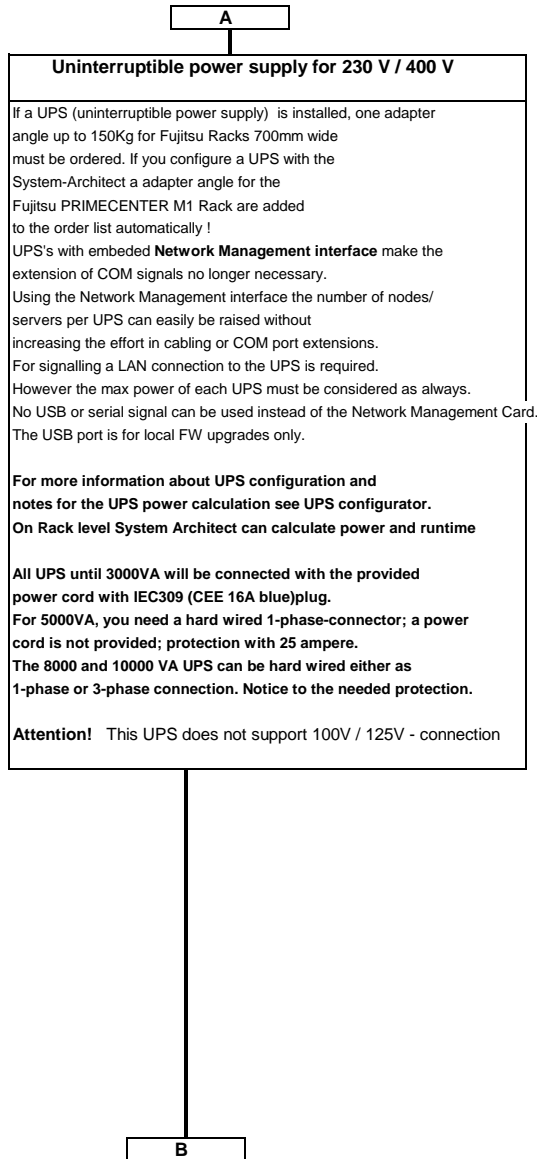

For the 3000 VA UPS is needed a 16A (IEC320 C20) plug. Here a power cord with IEC309 (16A CEE blue) is provided.

The 5000 VA UPS has a 1-phase permanent connection, it must be attached by an electrician.



COM port or USB access is not supported

Gen2 Online UPS via LAN port and by PCNS Management SW.

B Floor / Rack PY Online UPS variants

PY Online UPS are Tower / Rack convertible
Every basic units includes the stand up feet's for a Tower version, ordering of the rack mount rail kit allows the installation in 19" racks.
 LED front panel can be rotated 90°
 These PY Online UPS are real Double Conversion Online UPS
 Classified as VFI UPS (Voltage and Frequency Independent)
 Runtime can be increased, by using up to 10x external battery packs
 Automatic and manual Bypass, FW flash able, Hot Plug batteries,
 Circuit breakers for output, etc....

as soon as available Q2/16

S26361-K915-V302
PY Online UPS 3kVA / ??kW
based on FJRT3KXLI
Tower / Rack convertible
effective power ??00 W
black, with integrated network management interface, LCD display, one free Smart Slot built in automatic bypass stand up feet's for Tower incl. 3U in 19" racks
Output :
6x IEC320 C13 (10A)
4x IEC320 C19 (16A)
Power outlet groups:
2 switched outlet groups
Input :
power cord with 1-phase
16A IEC309 plug (CEE blue)
occupies 3U in racks

S26361-K915-V502
PY Online UPS 5kVA / 4,5kW
based on FJRT5KXLI
Tower / Rack convertible
effective power 5.000 W
black, with integrated network management interface, LCD display, one free Smart Slot built in automatic bypass stand up feet's for Tower incl. 3U in 19" racks
Output :
6x IEC320 C13 (10A)
4x IEC320 C19 (16A)
Power outlet groups:
2 switched outlet groups
Input :
1-phase hard wiring
trough electrician needed
occupies 3U in racks

S26361-K915-V802
PY Online UPS 8kVA / 8kW
based on FJRT8KXLI
Tower / Rack convertible
effective power 8.000 W
black, with integrated network management interface, LCD display, one free Smart Slot built in automatic bypass stand up feet's for Tower incl. 6U in 19" racks
Output :
6x IEC320 C13 (10A)
4x IEC320 C19 (16A)
binding post for hard wiring
Power outlet groups:
3 switched outlet groups
Input :
1- or 3-phase connection selectable, hard wiring trough electrician needed. automatic switching, in case of 1 phase failure to 1-phase operation
Dual input for bypass option to second input source
occupies 6U in racks

S26361-K915-V102
PY Online UPS 10kVA / 10kW
based on FJRT10KXLI
Tower / Rack convertible
effective power 10.000 W
black, with integrated network management interface, LCD display, one free Smart Slot built in automatic bypass stand up feet's for Tower incl. 6U in 19" racks
Output :
6x IEC320 C13 (10A)
4x IEC320 C19 (16A)
binding post for hard wiring
Power outlet gr
3 switched outlet groups
Input :
1- or 3-phase connection selectable, hard wiring trough electrician needed. automatic switching, in case of 1 phase failure to 1-phase operation
Dual input for bypass option to second input source
occupies 6U in racks

Reuse?? possible ???
S26361-F3151-L500
 Power Cord IEC320 C19 -> US NEMA L6-20p 4M
 This allows to connect the 3kVA UPS to a dual phase mains input >=200 Volt

as soon as available Q2/16

S26361-K915-V5
PY Online UPS battery extension 3kVA, external
Runtime extension for longer autonomous time, based on FJRT96BP, for all PY Online UPS rated 3KVA
Tower / Rack convertible; stand up feet's for Tower incl. connection cables to the UPS are included
occupies 3U in racks
max 10x per UPS

S26361-F2262-E500
UPS PDU 50A 2U, 6x16A+4x10A IEC320
Power distribution unit for UPS hard wire output
For APC Online UPS and Runtime expansion modules
occupies 2U in racks

S26361-F2735-E131
Dummy panel plastics, 2 U + assembly
S26361-F2735-E15
adapter angle up to 150KG

↑
 max. 10x
 per UPS
 ↓


S26361-K915-V3
PY Online UPS battery extension 5kVA, external
Runtime extension for longer autonomous time, based on FJRT192BP, for all PY Online UPS rated 5KVA
Tower / Rack convertible; stand up feet's for Tower incl. connection cables to the UPS are included
occupies 3U in racks
max 10x per UPS

S26361-K915-V4
PY Online UPS battery extension 8-10kVA, external
Runtime extension for longer autonomous time, based on FJRT192BP2, for all PY Online UPS rated from 8KVA to 10KVA
Tower / Rack convertible; stand up feet's for Tower incl. connection cables to the UPS are included
occupies 3U in racks
max 10x per UPS

i Order number for loose deliveries
 All UPS and Battery expansion units are basic units and can be ordered either for "loose" or for "assembly" purposes with the same order number.

i **S26361-F2262-L500**
 UPS PDU 50A 2U, 6x16A+4x10A IEC320
Loose delivery
 Connection at customer side has to be done by an electrician.

D

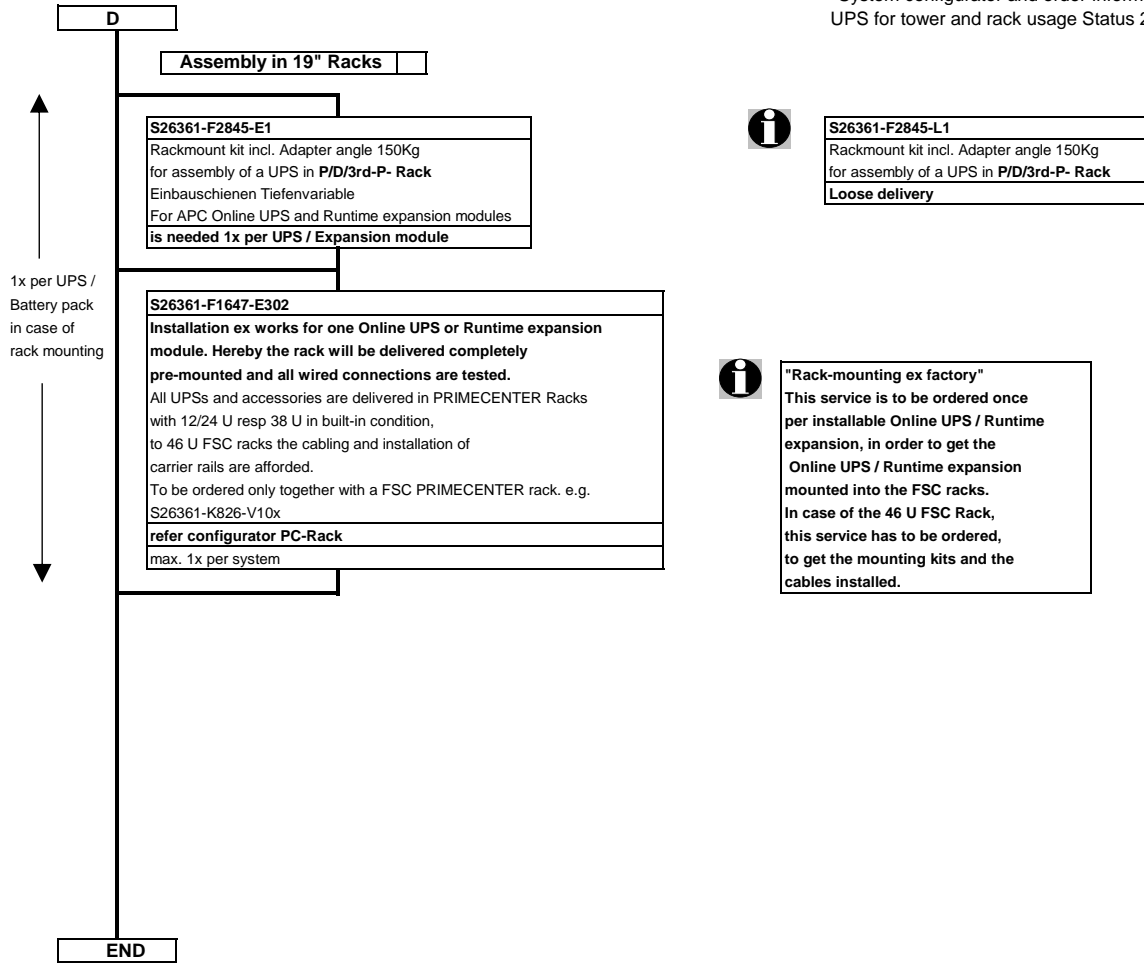

Information about Smart USV in the internet see:

<https://partners.ts.fujitsu.com/com/products/servers/primergy/rackcomp/components/usv/Pages/default.aspx>

Changereport

Date	Ordernumber	Changes
2015-08-12	S26361-K915-V200 / V2	EOL and deleted from configurator
2015-07-10	S26361-K915-V501 / V801 / V100	EOL and deleted from configurator
2014-12-15		updates for EOL / First Release datas
2014-10-28	S26361-K915-V5	Added 3kVA Battery Extension Unit for new GEN2 Online 3KVA UPS
2014-08-15		Extended Reneval waranty will not be released
2014-07-31		Draft first input Gen" Online UPS with Fujitsu front bezel
2014-07-31		EOL hint for 5kVA Line Interactive and 20kVA Online UPS
2013-04-13		added waranty offer for Line Interactive UPS
2012-11-27		complete re-work and added specific OS versions
2011-10-13		Adding new Fujitsu Line Interactive UPS, rework APC UPS
2011-07-27		Delete COM-Port Card, Cables and connections as well as classic Rack support
2011-07-27	S26113-F80-L30	Change S26113-F80-L10 to new card S26113-F80-L30
2010-03-30		new hint for 750 VA UPS
2009-01-15		some minor changes in wordings
2008-10-21		Online UPS without serial management, W2K8 OS added
2008-06-11	S26361-K915-V200 / V2	20kVA UPS and Batterypack added
2008-04-28	S26361-F3151-L500	Power cord for 3kVA UPS and dual phase mains connection added (input >=200Volt)
2008-04-28	S26361-K915-V301	New Online UPS added with DSP (digital signal processor) technology
2008-04-28	S26361-K915-V501	New Online UPS added with DSP (digital signal processor) technology
2008-02-18	S26113-E442-E/L50	New Rack / Tover convertibel UPS added, plus 3U adapetr angle, SW description changed
2006-11-27	S26361-K915-V80	APC -Online UPS rated8.0KVA effective power 6.4 kW - as soon as available
2005-12-20	S26113-F232-E1	APC-UPS COM Cable SCO,UnixWare+ass.PCR - no longer available
2005-12-20	S26113-F82-E1	APC-UPS Slot extension box +assembly PCR - no longer available
2005-06-20		Update OS mapping for interface cabling via RS-232
2005-04-27	S26113-E399-L1	APC-UPS 3000 VA (Floorstand) - no longer available
2004-11-09	S26113-E390-L1	APC - USV with 700VA black, USB and COM Port - no longer available
2004-07-23		Some released operating systems changed
2004-03-24		Some released operating systems changed
2004-02-09	S26113-E390-L750	APC - USV with 750VA black, USB and COM Port - as soon as available
2004-01-26	S26361-K915-V100 / V75	Description connection panel changed
2003-11-14	S26361-K915-V100	APC -Online UPS rated10KVA effective power 8000 W - now available
2003-11-14	S26361-K915-V75	APC -Online UPS rated7.5KVA effective power 6000 W - now available
2003-09-23	SNP:PS-E421E1-P/ -L1-P	APC-UPS 3000 VA (3U, for 19" rack) - no longer available
2003-06-25		Online UPS included